




XPEDITION 2 i-Size

USER GUIDE

MODEL: XPEDITION 2 i-Size ECE R129.03 v.1.0

CAUTION! The product graphics are for illustrative purposes only!

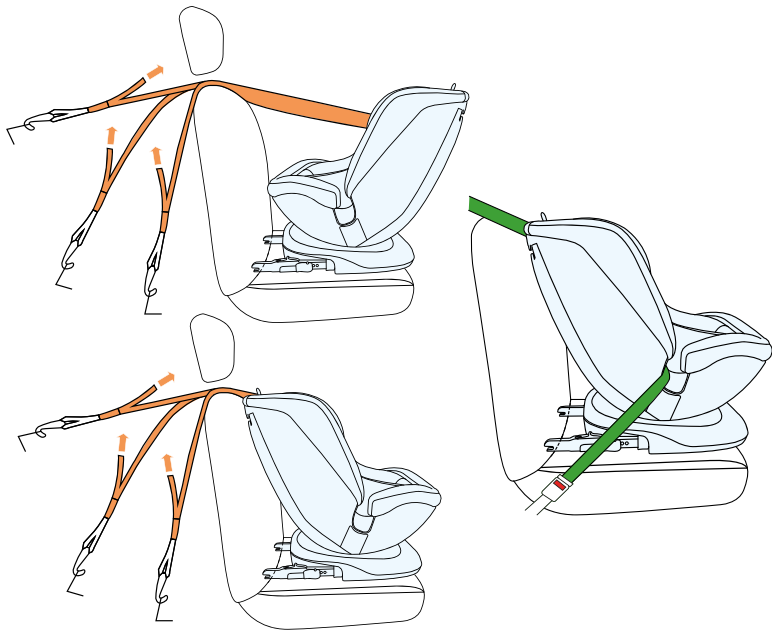

Please carefully read the user manual before using the child car seat for the first time. Ensuring the safety of the child is your responsibility, and not reading this manual may have an impact on their safety.













1.0 Usage


The car seat has been designed, tested, and approved for use in accordance with the requirements of regulation No. 129 of the UNECE/ONU regarding the approval of child restraint systems (UN/ECE R129/03).

Do not place the car seat facing forward until the child reaches 15 months and has a height of 76 cm.

The car seat can be installed in the car in locations indicated by the manufacturer in the vehicle's user manual. Reading the vehicle manufacturer's operating manual is required.

To ensure proper installation, please refer to the table on the next page.

Height of the child	Car seat orientation	Car seat attachment
40-105 cm		<p>ISOFIX + Top Tether + inner harness straps</p> <div style="display: flex; justify-content: space-around; align-items: center;">    </div> <p>ISOFIX</p>
76-105 cm		<p>ISOFIX + Top Tether + inner harness straps</p> <div style="display: flex; justify-content: space-around; align-items: center;">    </div> <p>ISOFIX</p>
100 – 150 cm		<p>ISOFIX + 3-point safety harness</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>ISOFIX</p>
		<p>3- point safety harness</p> <div style="display: flex; justify-content: center; align-items: center;">  </div>

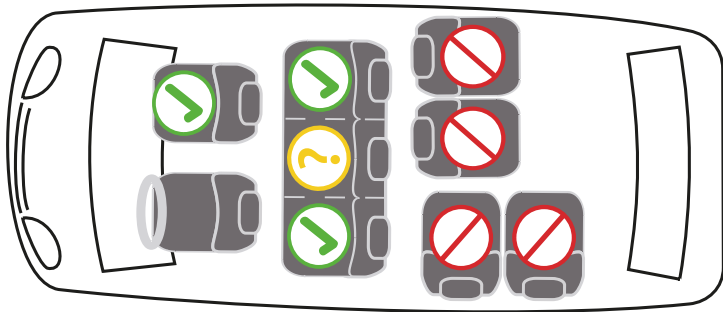

2.0 Safety instructions

Please take a few minutes to read this user manual to ensure appropriate child's safety.



- DO NOT install the car seat on seats facing backward or sideways to the direction of travel



- A child seat can only be fitted in the middle seat if it has 3-point safety belts. DO NOT place the child's car seat on seats equipped with an active front airbag.







- If the car seat is installed in the front seat, the front airbag must be deactivated.
- It is recommended to install the car seat only on the back seats of the car

Information on the suitability of the car seat for use with a child seat can be found in the vehicle's operating instructions.

- Make sure that the inner harness straps holding your child are suitable for your child's build and are not twisted. Therefore, do not place thick clothing under the child's belt.
- The lap straps of the seat belt must run as low as possible over your child's pelvis to ensure optimum effect in the event of an accident.
- The seat must be replaced if it has been subjected to heavy loads in a road accident.
- The car seat must not be modified in any way without the authorisation of the relevant approval authority. If the seat is not installed in accordance with the manufacturer's instructions, this may endanger life and health.
- Protect the child car seat from direct sunlight, otherwise your child may burn themselves on the heated parts. Protect your child and the child seat from direct sunlight.

- Never leave a child unattended in a child seat.
- Make sure that luggage and other objects are adequately secured, especially on the shelf under the rear window, as they can cause injuries in the event of a collision.
- The seat must not be used without the cover.
- Do not use any replacement cover other than that recommended by the manufacturer, as it is an essential part of the seat's safety system.
- Do not use any attachment points other than those described in the instructions and labelled on the seat.
- All hard parts and plastic parts of the child seat must be positioned and installed in such a way that they cannot be pinched by the sliding seat or the vehicle door under normal conditions of use.
- Check the condition of the seat regularly, paying particular attention to the attachment points, seams and adjustment parts. Make sure that all mechanical parts are fully functional. Never lubricate or oil components of the child seat.

- Do not use the seat if parts are damaged or loose.
 - In an emergency, it is important to release the harness quickly. This means that the button for releasing the harness is not fully secured.
 - Set a good example for your child and always buckle up. An adult who is not buckled up can also pose a danger to a child.
 - Make sure the seat is properly secured before every car journey.
 - The seat should also be secured when it is not in use. An unsecured child seat can also cause injury to the occupants in the event of emergency braking.
- On some car seats made of sensitive materials, the use of the car seat can leave marks and/or cause discolouration. To prevent this, you can place a blanket, towel or similar product under the car seat.

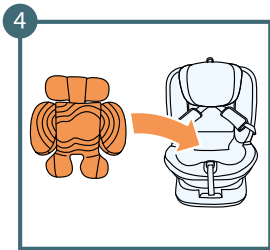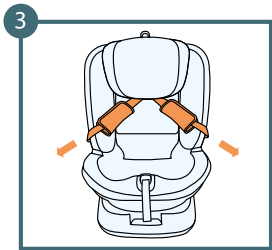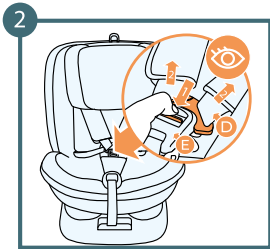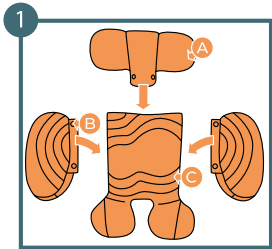





- A: Head part of the insole**
- B: Insole sides**
- C: Inner side of the insole**
- D: Inner straps**
- E: Inner strap's buckle**

3.0 Securing the child

3.1 Inserting the insole

The additional insole should be used until the child reaches 76 cm.



1. Connect the headrest section of the insole and its sides of to the inner section by using the fasteners
2. Unfasten the safety harness
3. Spread the belts to the sides of the seat
4. Insert the insole

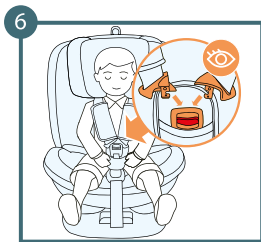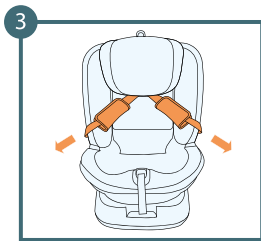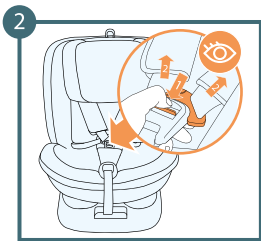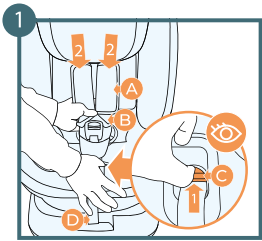

3.2 Securing the child with the inner harness straps

1. Loosen the harness straps all the way by pressing the button and pulling on the harness straps. Remember! Do not pull on the shoulder pads.
2. Unclip the safety harness
3. Place the harness straps on the sides of the seat
4. Place the child in the car seat
5. Adjust the headrest to your child's height
6. fold the two buckle clasps together to interlock and insert them into the buckle until you hear a "click"

- A: Harness straps**
- B: Harness buckle**
- C: Adjustment button**
- D: Harness adjustment strap**

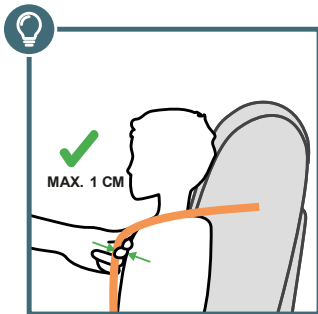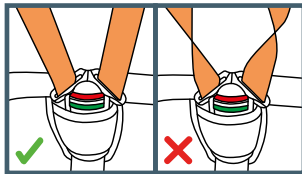

A: Inner straps
B: Harness adjustment strap

3.3 Tightening the harness


1. Pull on the inner straps to eliminate looseness in the hip section, the harness should lie flat.
2. Press the harness with the adjustment strap until the harness lies flat on the child's body.





IMPORTANT: Make sure the harness straps are not twisted.



Ensure that the straps are tightened so that there is no more than 1cm of space between them and the child.

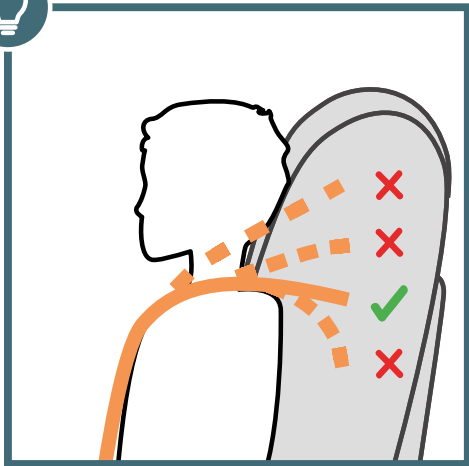

Adjust the appropriate height of the shoulder straps so that the belt enters the car seat's backrest flat, horizontally just above the child's shoulders.

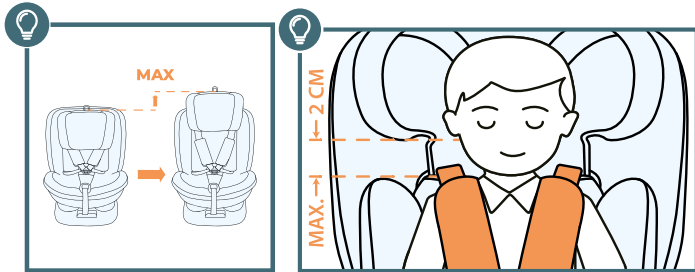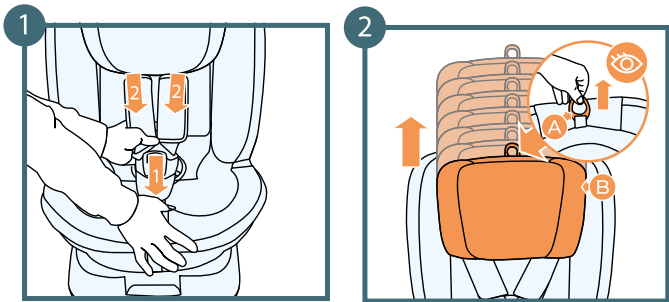

A: Headrest height adjustment lever

B: Headrest





3.4 Headrest height

1. Loosen the harness straps all the way by pressing the button and pulling the harness straps **Remember! Do not pull on the shoulder pads.**
2. Grasp the headrest height adjustment lever, which is located at the back of the headrest, and pull gently upwards
3. Adjust the headrest by selecting one of the 7 positions, when the height is adjusted let go of the adjustment strap

IMPORTANT! Make sure the car seat's headrest is locked



The headrest should fit well around the child's head, the lower part of the headrest should be at shoulder height.

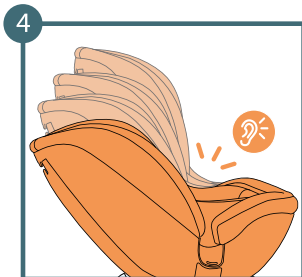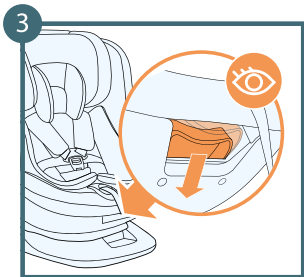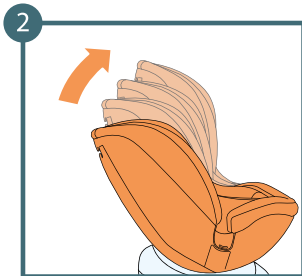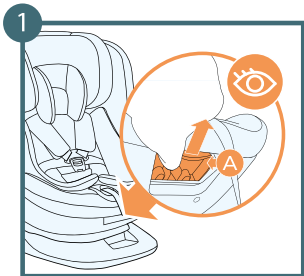


A: Seat tilt adjustment lever

3.5 Seat tilt adjustment mechanism





1. Pull the seat tilt adjustment lever
2. Adjust the seat tilt angle
3. Release the lever in the required position (one of the four possible)
4. Gently move the seat until you hear a clear "click" sound



CAUTION! In the later stages of installation, remember to loosen the Top Tether strap before adjusting the backrest tilt.

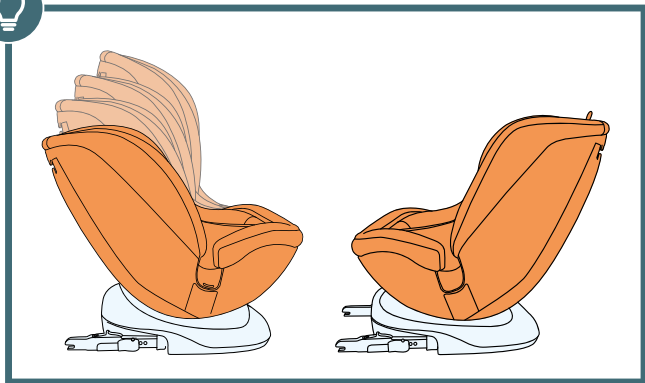

CAUTION! When the car seat is facing forward, you can use 4 positions for adjusting the backrest. However, when the car seat is facing backward, you can only use 1 position for adjustment.

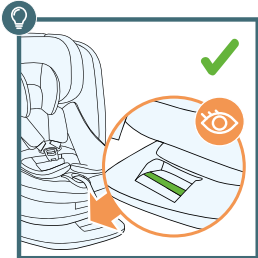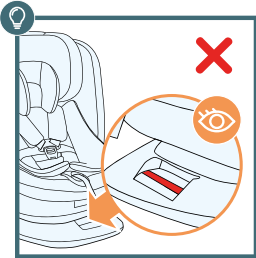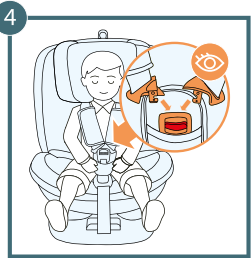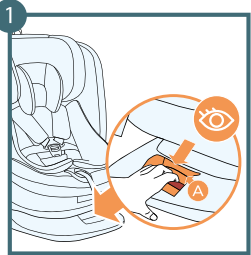

A: Seat rotation lever

3.6 Rotation mechanism

The rotation mechanism is a feature that helps to comfortably position the child or remove them from the car seat.


1. Pull the seat rotation lever
2. Rotate the car seat in the direction you choose. You will hear a "click" indicating that the car seat is locked in the selected position.
3. Place the child in the car seat.
4. Secure the child with the safety harness



Pay attention to the audible locking sound of the rotation mechanism



When the seat is correctly locked, the rotating mechanism indicator should show green colour.

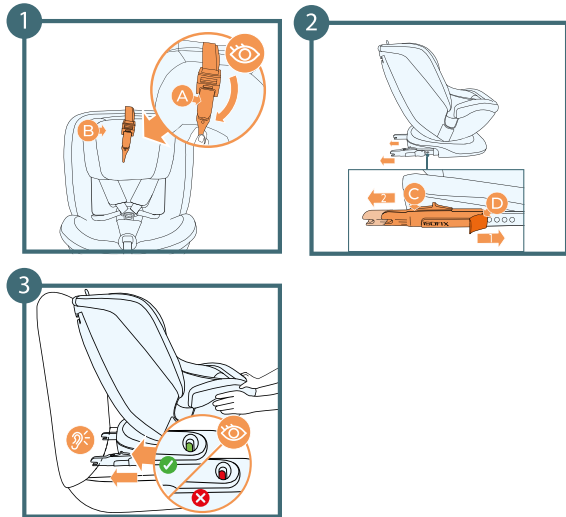

- A: Top Tether belt**
- B: Headrest**
- C: ISOFIX arms**
- D: ISOFIX release lever**

4.0 Assembly in the vehicle





4.1 ISOFIX installation

1. Place the Top Tether strap on the headrest, making sure not to obstruct access for future stages of car seat installation.
2. Pull the ISOFIX release lever and extend the arms of the ISOFIX connectors to their maximum length.
3. Hold the car seat with both hands and insert both clips into the attachments in the car seat. After hearing a "click" from each of the ISOFIX clips, push the car seat's base against the backrest, applying firm, even pressure on both sides.



Pay attention to the audible sound of the ISOFIX connectors snapping and grasp the seat and check that it is securely fastened, without any looseness . If it moves and the ISOFIX connectors slip out, repeat the previous steps.

CAUTION! The locking clips are properly secured only when both button indicators are completely green.

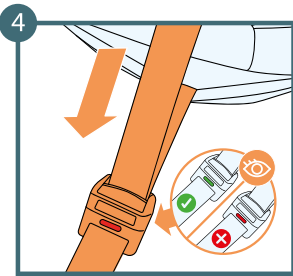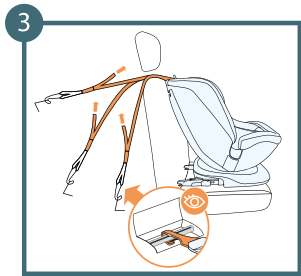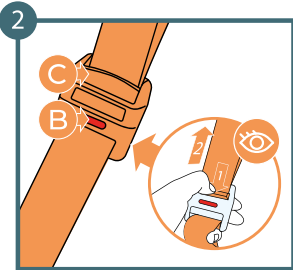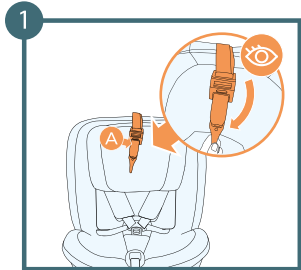


- A: Top Tether strap/upper fixing strap**
- B: Correct strap installation indicator**
- C: Strap loosening belt**






4.2 The „Top Tether” assembly

1. Pull out the upper securing strap (Top Tether).
2. Press the strap release button to loosen it (the length of the strap must allow you to attach the hook to the anchoring point located at the back of the vehicle seat or in the trunk).
3. Attach the securing strap's hook to the vehicle's anchoring point (make sure to familiarize yourself with the vehicle's manual).
4. Pull the securing strap from the other end to eliminate any slack.

IMPORTANT: The Top Tether strap should not run over the vehicle's headrest. It should run beneath it. If this is not possible, the headrest must be removed (check if this is allowed according to the vehicle's user manual).

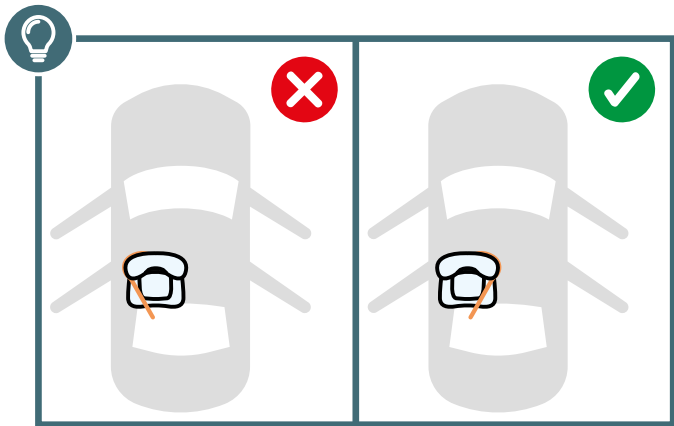

CAUTION! To use the rotation system, the Top Tether strap must be fitted on the inside of the vehicle (opposite side from the door).

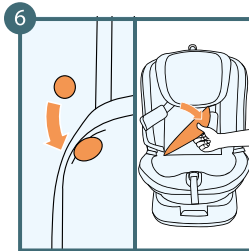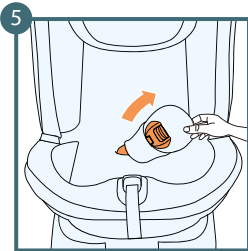
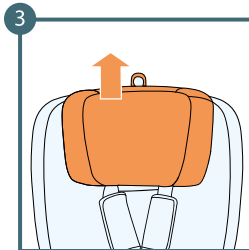
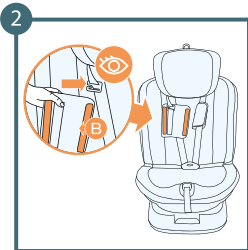
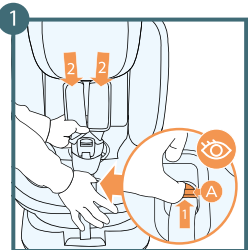


A: Inner straps adjustment button

B: Shoulder pad

5.0 Hiding the 5-point safety harness

1. Loosen the safety harness completely by pressing the button and pulling the safety harness. Remember! Do not pull on the shoulder pads.
2. Remove the shoulder and buckle pads by unfastening the hoop&loop tapes located on the sides.
3. Place the headrest in the highest position.
4. Unclip the buckle.
5. Remove the buckle pad and insert the buckle under the cover.
6. Unfasten the snaps and uncover the backrest of the car seat.


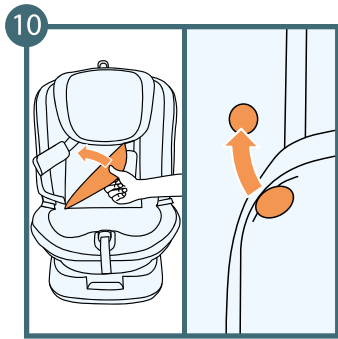
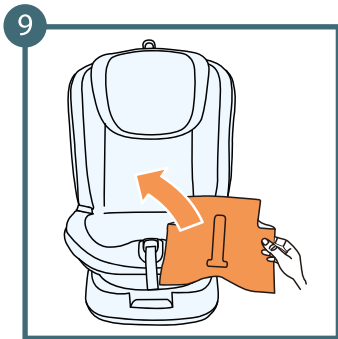
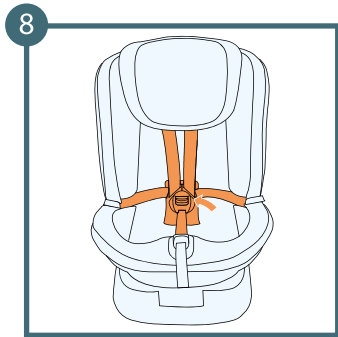
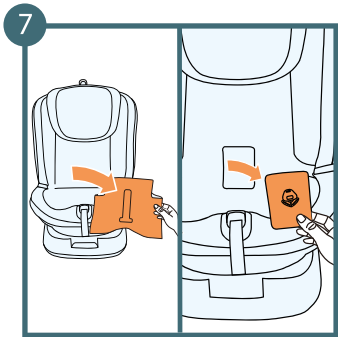


7. Pull out the foam located on the seat, and then remove the styrofoam cover underneath it.

8. Fasten the 5-point safety harness and tuck the fastened belts into the storage compartment so that they are laid flat along the backrest.

9. Place the foam back on the seat. **Remember! Do not discard the styrofoam that was under the car seat's seat.**

10. Fasten the snaps and cover the backrest of the car sea

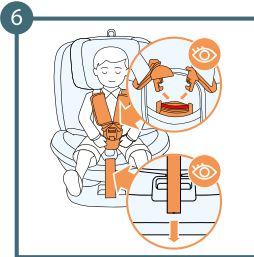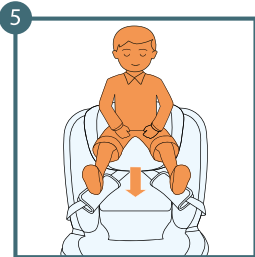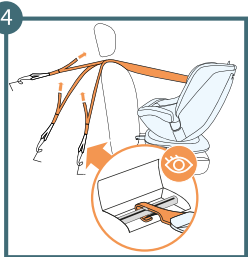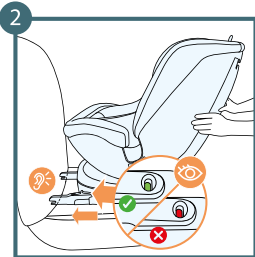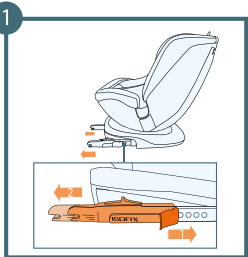

6.0 Car seat assembly

Caution! The seat should be placed directly on the vehicle seat.






6.1 Children with a height between 40 to 105 cm using the ISOFIX system and the upper fixing strap („Top Tether”).







1. Install the car seat on the seat using the ISOFIX connectors, facing backward (if the car seat is already installed forward facing, rotate it using the rotation mechanism).
2. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
3. Adjust the headrest to the child's height.
4. Secure the car seat using the Top Tether strap.
5. Place the child in the car seat.
6. Secure the child with the internal safety harness.

IMPORTANT! If the child has already reached 76 cm in height before placing them in the car seat, remove the inner insole.

6.2 Children with a height between 76 to 105 cm using the ISOFIX system and the upper fixing strap („Top Tether”).

1. Install the car seat on the seat facing forward, using the ISOFIX connectors. (If the car seat is already installed facing backward, rotate it using the rotational mechanism).
2. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
3. Secure the car seat using the Top Tether strap.
4. Adjust the headrest to the child's height.
5. Place the child in the car seat.
6. Secure the child with the internal safety harness.

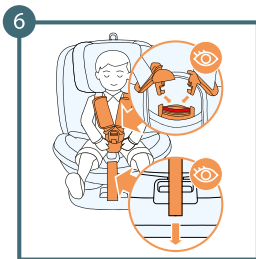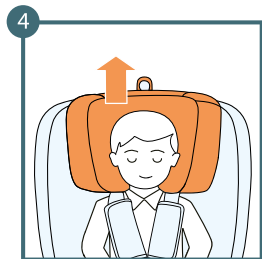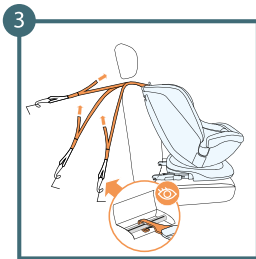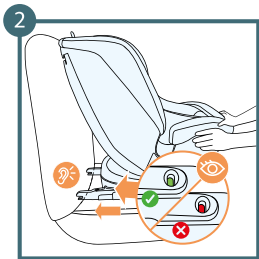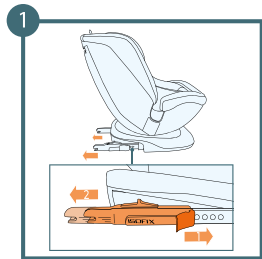

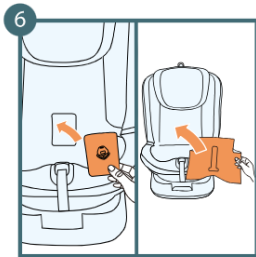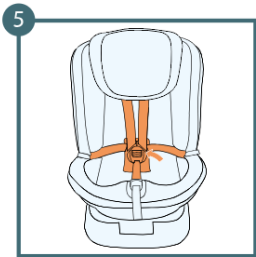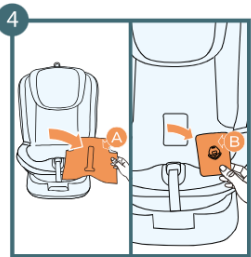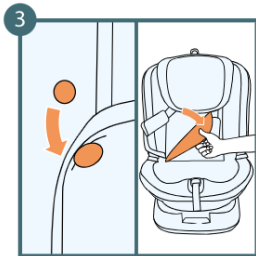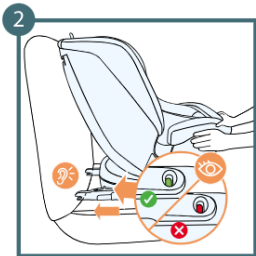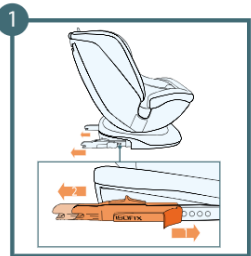

A: Seat foam
B: Styrofoam insole



6.3 Children with a height between 100 to 150 cm using the ISOFIX connectors and the vehicle's 3-point safety belts.





1. Install the car seat on the seat using the ISOFIX connectors, facing forward.
2. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
3. Uncover the shell of the car seat by detaching the snaps located on its edges.
4. Pull out the foam located on the seat, and then remove the styrofoam cover underneath it.
5. Fasten the 5-point safety harness and tuck the fastened belts into the compartment so that they are laid flat along the backrest. The entire procedure is precisely described in the section regarding hiding the harness
6. Place the foam back on the seat. Remember! Do not discard the styrofoam that was under the car seat's seat.

7. Fasten the snaps and cover the backrest of the car seat.

8. Thread the shoulder strap through the green shoulder strap guide.

9. Thread the car belt through both hip strap guides. Fasten the car belt. You will hear a characteristic "click."

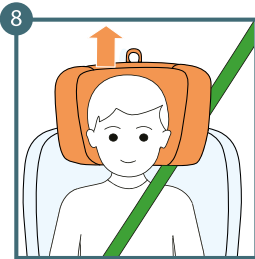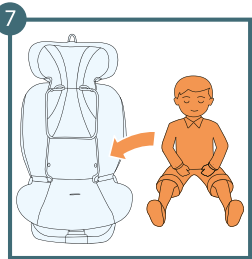


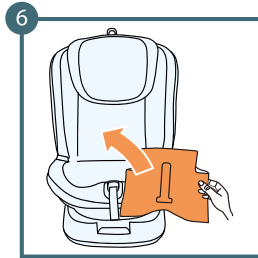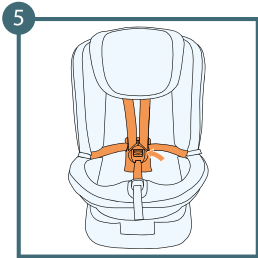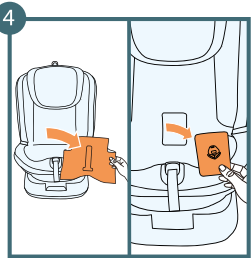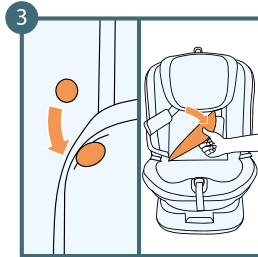


6.4 Children with a height between 100 to 150 cm using the vehicle's 3-point safety belts.

1. Install the car seat on the seat facing forward.
2. Push the car seat as far as possible against the backrest of the seat.
3. Uncover the shell of the car seat by detaching the snaps located on its edges.
4. Pull out the foam located on the seat, and then remove the styrofoam cover underneath it.
5. Fasten the 5-point safety belts and tuck the fastened belts into the compartment so that they are laid flat along the backrest. The entire procedure is precisely described in the section regarding hiding the harness.
6. Place the foam back on the seat. Remember! Do not discard the styrofoam that was under the car seat's seat.

7

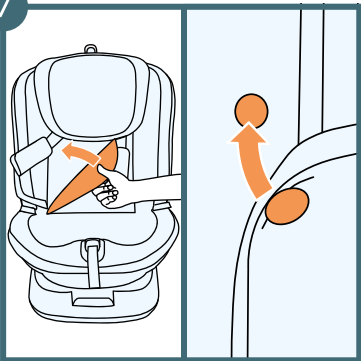




8

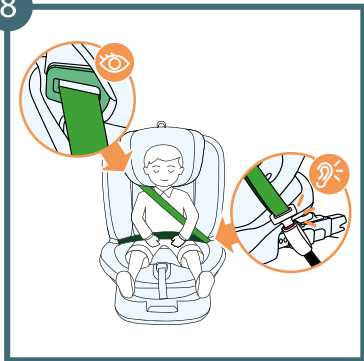

7. Fasten the snaps and cover the backrest of the car seat.


8. Thread the shoulder strap through the green shoulder strap guide.

Thread the car belt through both hip strap guides. Fasten the car belt. You will hear a characteristic "click."




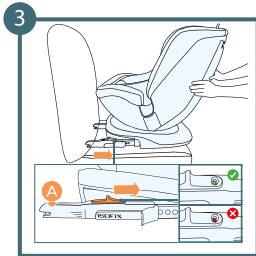
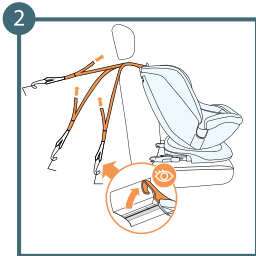
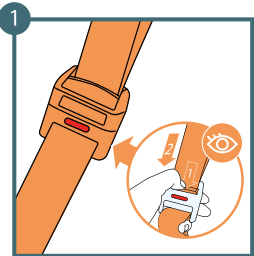


7.0 Disassembly of the car seat (ISOFIX installation system)

1. Loosen the Top Tether strap by pressing the release button and pulling the strap towards you.
2. Remove the securing hook from the vehicle's anchoring point.
3. Simultaneously press the ISOFIX release buttons on both arms of the ISOFIX connector (the color indicators should change to red).
4. Slide the car seat out of the ISOFIX guides.
5. Insert the ISOFIX arms back into the base of the car seat.

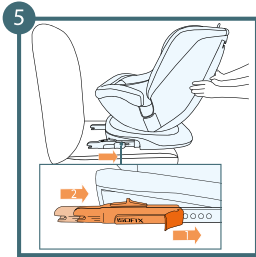

A: ISOFIX arms




- A: Inner insole**
- B: Headrest**
- C: Buckle pad**
- D: Shoulder pad**
- E: Snaps**

7.1 Cover disassembly


- 1.Remove the insole.
- 2.Loosen the safety belts completely by pressing the button and pulling the safety belts. Remember! Do not pull on the shoulder pads.
- 3.Adjust the headrest to the highest position.
- 4.Remove the shoulder pads and the cushion from the buckle.
- 5.Unfasten the four snaps securing the cover to the front part of the car seat backrest, as well as the snaps on the sides of the car seat.
- 6.Gently slide the material off the headrest by pulling it slightly from the side.

7

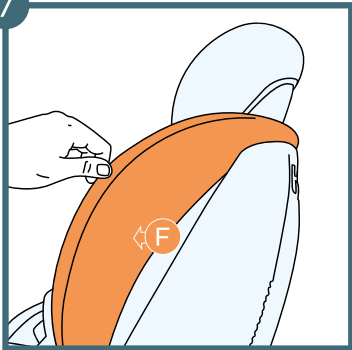

F: Cover for the front part of the car seat backrest

8

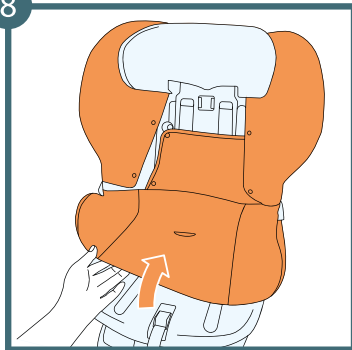

7. Slide the cover off the front part of the seat, gently pulling the fabric from both sides.

8. Slide off the fabric from the car seat by passing it over the headrest.

7.2 Cover assembly

To reinstall the cover simply reverse the above sequence of steps.

Fit the cover to the attachment points on the seat. Start by fitting the cover to the shell of the car seat and finally to the headrest section.

8.0 Cleaning

CAUTION! Do not use the seat without the cover.

- The cover can be removed and washed with mild detergent on a gentle cycle (30°C).
- Follow the washing instructions provided on the cover's label. Washing at temperatures above 30°C may cause colors to fade.
- Do not spin or tumble dry the cover (which may cause layers of fabric to separate).
- Do not expose the cover to prolonged sunlight.
- Plastic components can be cleaned with water and mild soap.
 - Do not use aggressive cleaning agents (such as solvents).
- The harness can be cleaned with lukewarm water and soap.

Warning! Metal fasteners should never be removed from the straps.

The full Warranty Terms and Conditions are available on the website WWW.KINDERKRAFT.COM



(AR) بضمان مصلحة عملائنا. نحن في خدمتكم! إذا كانت لديكم أي مشكلة مع المنتج الذي حصلتم عليه، فيجربى الاتصال بنا بالطريقة التي تفضلونها!

(CS) V zájmu péče o naše klienty - jsme rádi k dispozici! Pokud jste se setkali s nějakým problémem v souvislosti s obdrženým výrobkem, kontaktujte nás způsobem, který vám nejvíce vyhovuje!

(DE) In Sorge für unsere Kunden - stehen wir gerne zu Ihrer Verfügung! Wenn Sie auf ein Problem mit dem erhaltenen Produkt treffen, treten Sie bitte mit uns in Kontakt in der bequemsten Weise für Sie!

(EN) In the interests of our Clients - we are at your disposal! If you have a problem with the product you received, contact us in the most convenient way for you!

(ES) ¡Por el bien de nuestros clientes, estamos a su disposición! ¡Si tiene cualquier problema con el producto recibido, póngase en contacto con nosotros de forma más cómoda para usted!

(FR) Dans l'intérêt de nos clients - nous sommes à votre disposition! Si vous avez un problème avec le produit que vous avez reçu, Contactez-nous de la manière la plus pratique pour vous!

(HU) Bármikor állunk az ügyfeleink rendelkezésére! Ha az átvett termékkel kapcsolatban valamilyen problémába ütközött, az Önnek legmegfelelőbb módon vegye fel velünk a kapcsolatot!

(IT) Prendersi cura dei nostri Clienti - siamo alla Vostra disposizione! Se hai incontrato un problema con il prodotto che hai ricevuto. Contattaci nel modo piu conveniente per te!

(NL) In het belang van onze klanten - staan wij ter beschikking! Als u een probleem met het ontvangen product tegenkomt, neemt contact met ons op via de manier die u het makkelijkste vindt!

(PL) W trosce o naszych Klientów - jesteśmy do dyspozycji! Jeśli napotkałeś problem dotyczący otrzymanego produktu, skontaktuj się z nami w najbardziej dogodny dla Ciebie sposób!

(PT) Para o conforto dos nossos Clientes - estamos sempre à sua disposição! Se tiver qualquer problema com o nosso produto, entre em contacto conosco de modo mais confortável para si!

(RO) In interesul clienților noștri - suntem la dispoziția dumneavoastră! Dacă aveți o problema cu produsul pe care l-ați primit, contactați-ne în modul cel mai convenabil pentru dvs.!

(RU) заботясь о наших клиентах, мы находимся в вашем распоряжении. Если вы столкнулись с проблемой, связанной с полученными продукто, свяжитесь с нами наиболее удобным для вас способом!

(SK) Náš zákazník je pre nás dôležitý - sme vám k dispozícii! Ak máte akýkoľvek problém súvisiaci s doručeným produktom, kontaktujte nás spôsobom, ktorý vám najviac vyhovuje!

(SV) I våra kundens intresse - vi står till ditt förfogande! Om du har problem med den produkt du fick, kontakta oss på det mest praktiska sättet för dig!

International contact:

support@kinderkraft.com

+44 20 4525 0748



kinderkraftofficial



kinderkraft



kinderkraftofficial

منتج/ VÝROBCE/HERSTELLER/MANUFACTURER/FABRICANTE/FABRICANT/
GYARTÓ/FABBRICANTE/FABRIKANT/PRODUCENT/FABRICANTE/PRODUCĂTOR/
ПРОИЗВОДИТЕЛЬ/VÝROBCA/TILLVERKARE:

**4Kraft Sp. z o.o. ul. Tatrzańska 1/5
60-413 Poznań, Poland**