


XRIDER i-Size

USER GUIDE

MODEL: XRIDER i-Size ECE R129.03 v.1.0

CAUTION! The product graphics are for illustrative purposes only!

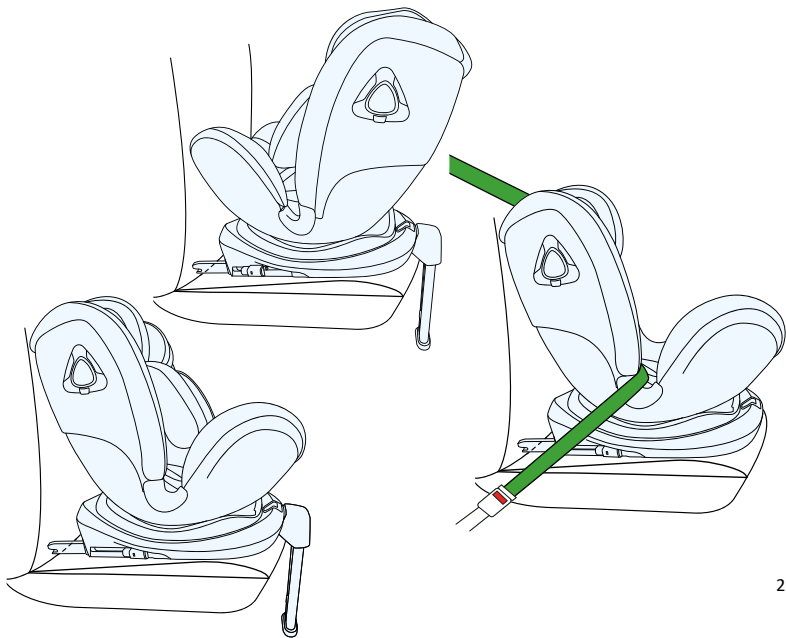




1.0 Usage


The car seat has been designed, tested, and approved for use in accordance with the requirements of regulation No. 129 of the UNECE/ONU regarding the approval of child restraint systems (UN/ECE R129/03).

Do not place the car seat facing forward until the child reaches 15 months and has a height of 76 cm.

The car seat can be installed in the car in locations indicated by the manufacturer in the vehicle's user manual. Reading the vehicle manufacturer's operating manual is required.

To ensure proper installation, please refer to the table on the next page.

Height of the child	Seat orientation	Seat attachment
40cm–105cm		ISOFIX + support leg + internal harness straps
76cm-105cm		ISOFIX + support leg + internal harness straps
100cm-125cm		ISOFIX + support leg + internal harness straps

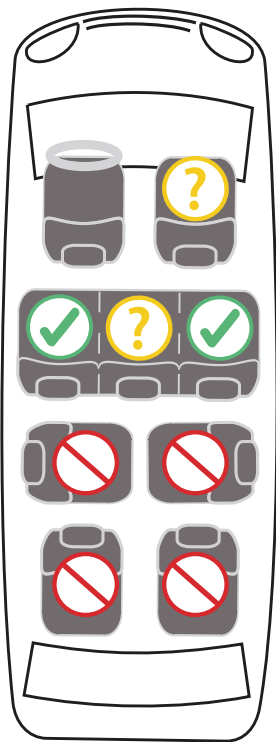

2.0 Safety instructions

Please take a few minutes to read this user manual to ensure appropriate child's safety.



- DO NOT install the car seat on seats facing backward or sideways to the direction of travel.



- The car seat may only be installed if the seat has 3-point safety belts. The front airbag must be deactivated.





- It is recommended to install the car seat only on the back seats of the car.

Information on the suitability of the car seat for use with a child seat can be found in the vehicle's operating instructions.

- Make sure that the inner harness straps holding your child are suitable for your child's build and are not twisted. Therefore, do not place thick clothing under the child's belt.
- The lap straps of the seat belt must run as low as possible over your child's pelvis to ensure optimum effect in the event of an accident.
- The seat must be replaced if it has been subjected to heavy loads in a road accident.
- The car seat must not be modified in any way without the authorisation of the relevant approval authority. If the seat is not installed in accordance with the manufacturer's instructions, this may endanger life and health.
- Protect the child car seat from direct sunlight, otherwise your child may burn themselves on the heated parts. Protect your child and the child seat from direct sunlight.

- Never leave a child unattended in a child seat.
- Make sure that luggage and other objects are adequately secured, especially on the shelf under the rear window, as they can cause injuries in the event of a collision.
- The seat must not be used without the cover.
- Do not use any replacement cover other than that recommended by the manufacturer, as it is an essential part of the seat's safety system.
- Do not use any attachment points other than those described in the instructions and labelled on the seat.
- All hard parts and plastic parts of the child seat must be positioned and installed in such a way that they cannot be pinched by the sliding seat or the vehicle door under normal conditions of use.
- Check the condition of the seat regularly, paying particular attention to the attachment points, seams and adjustment parts. Make sure that all mechanical parts are fully functional. Never lubricate or oil components of the child seat.

- Do not use the seat if parts are damaged or loose.
 - In an emergency, it is important to release the harness quickly. This means that the button for releasing the harness is not fully secured.
 - Set a good example for your child and always buckle up. An adult who is not buckled up can also pose a danger to a child.
 - Make sure the seat is properly secured before every car journey.
 - The seat should also be secured when it is not in use. An unsecured child seat can also cause injury to the occupants in the event of emergency braking.
- On some car seats made of sensitive materials, the use of the car seat can leave marks and/or cause discolouration. To prevent this, you can place a blanket, towel or similar product under the car seat.

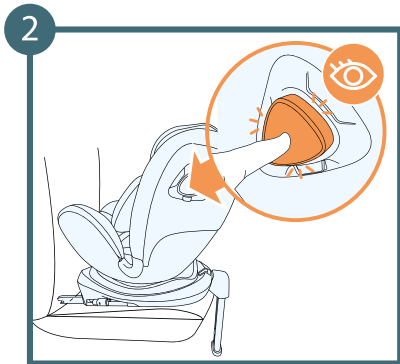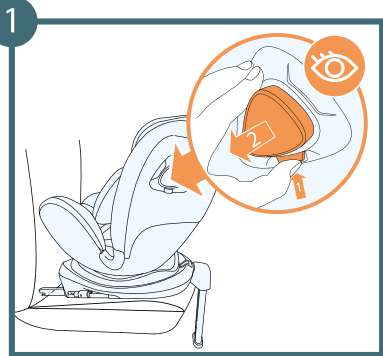


2.1 Side Impact Protection

To provide additional protection in case of a side impact, the car seat is equipped with a bumper (side panel). The bumper should be positioned towards the car doors.

Opening and closing the side panel:

1. Press the button located on the side panel - the side cover should automatically extend. You will hear a characteristic sound.
2. Check if the cover is extended properly by attempting to push it inwards (without pressing the button) - the cover should not allow itself to be pushed inside the seat.

To close the side panel, press the button and hold it while pushing the bumper towards the center.

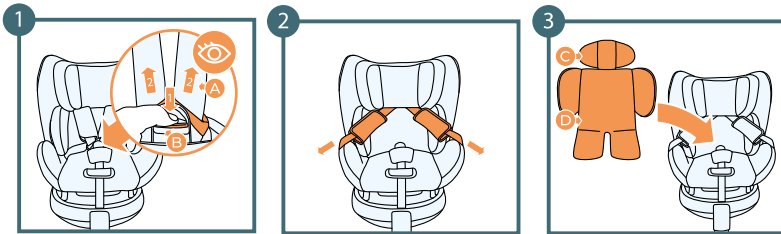








- A: Inner belts**
- B: Belt buckle**
- C: Headrest part of the insole**
- D: Insole**

3.0 Securing the child

3.1 Inserting the insole

The additional insole should be used until the child reaches 76 cm.


1. Unfasten the safety harness
2. Spread the belts to the sides of the seat
3. Insert the insole



- A: Harness adjustment button**
- B: Harness straps**
- C: Harness strap adjuster**
- D: Harness straps**

3.2 Securing the child with the Inner harness straps

1. Press the harness adjustment button while pulling the harness straps. **Remember! Do not pull on the shoulder pads.**
2. Unclip the safety harness
3. Place the harness straps on the sides of the seat
4. Place the child in the car seat
5. Adjust the headrest to the child's height
6. Fasten the belts
7. Adjust the safety harness to the child by pulling on the harness strap adjuster.

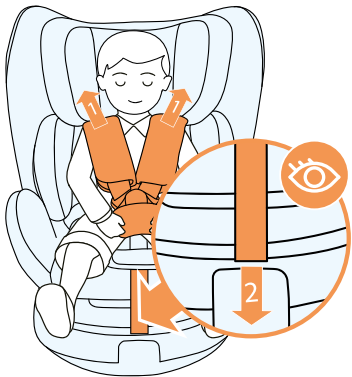

3.3 Tightening the harness




1. Pull on the inner straps to eliminate looseness in the hip section, the harness should lie flat.
2. Press the harness with the adjustment strap until the harness lies flat on the child's body.




IMPORTANT: Make sure the harness straps are not twisted.




Ensure that the straps are tightened so that there is no more than 1cm of space between them and the child.



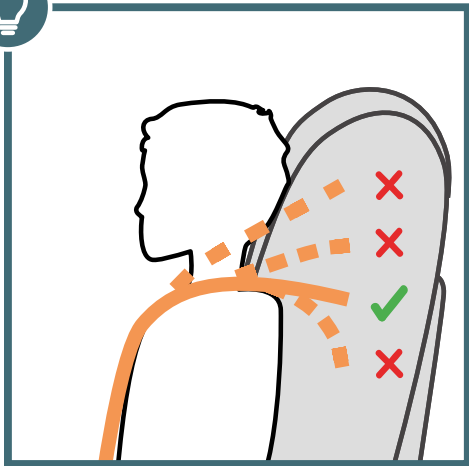


Adjust the appropriate height of the shoulder straps so that the belt enters the car seat's backrest flat, horizontally just above the child's shoulders.

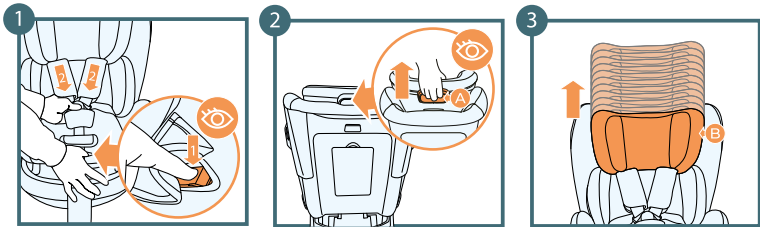

3.4 Height of the headrest

The headrest should fit well around the child's head, the lower part of the headrest should be at shoulder height.

1. Loosen the harness straps all the way by pressing the button and pulling the harness straps **Remember! Do not pull on the shoulder pads.**
2. Grasp the headrest height adjustment lever, which is located at the back of the headrest, and pull gently upwards
3. Adjust the headrest by selecting one of the 11 positions, when the height is adjusted let go of the adjustment strap

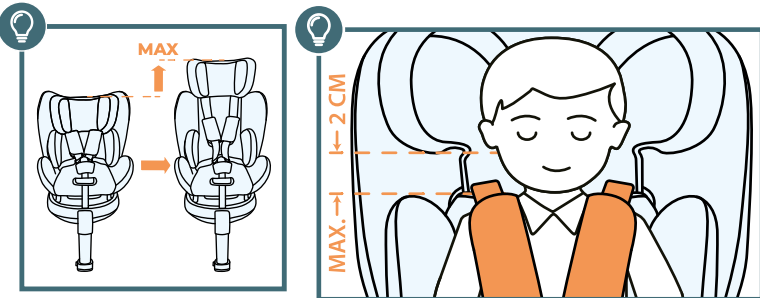




A: Headrest height adjustment lever
B: Headrest



IMPORTANT! Make sure the car seat's headrest is locked




The headrest should fit well around the child's head, the lower part of the headrest should be at shoulder height.

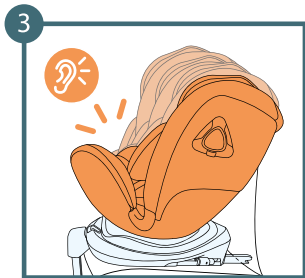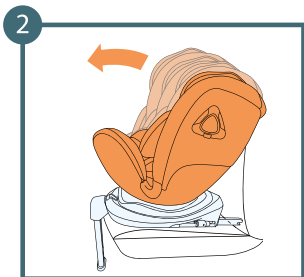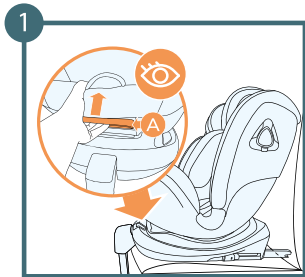





A: Seat tilt adjustment lever

3.5 Seat tilt adjustment mechanism

1. Pull the seat tilt adjustment lever
2. Adjust the seat tilt angle and release the lever in the required position (one of the four possible)
3. Gently move the seat until you hear a clear "click" sound

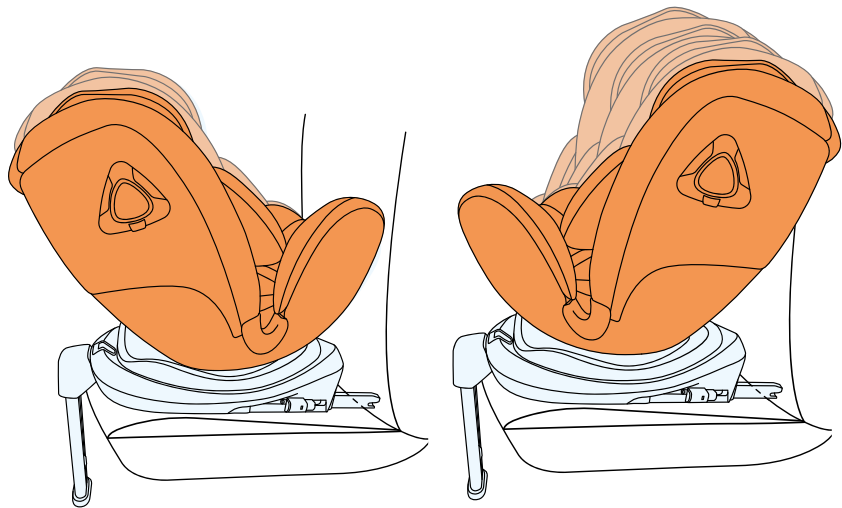

Caution! When the car seat is facing forward, you can use 4 positions for adjusting the backrest. However, when the car seat is facing backward, you can only use 1 position for adjustment.

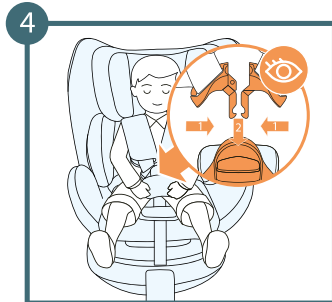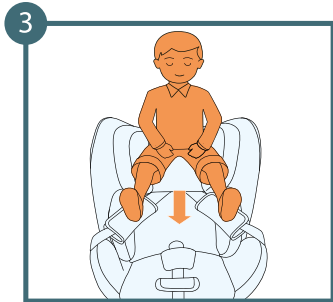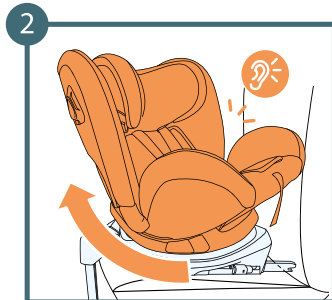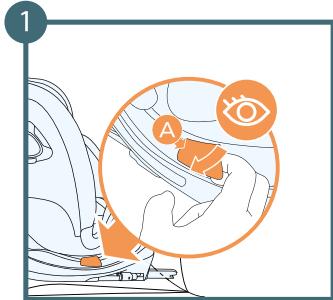

A: Seat swivel lever



3.6 Rotation mechanism

The rotation mechanism is a feature that helps to comfortably position the child or remove them from the car seat.

- 1.Pull one of the seat rotation levers located on the sides of the seat.
- 2.Rotate the car seat in the direction you choose. You will hear a "click" indicating that the car seat is locked in the selected position.
- 3.Place the child in the car seat.
- 4.Secure the child with the safety harness.




Pay attention to the audible locking sound of the rotation mechanism

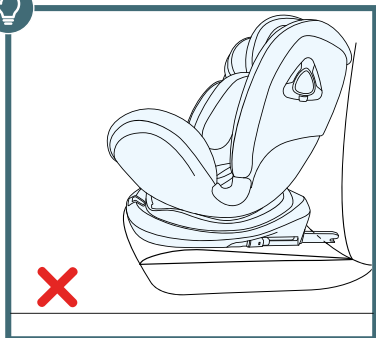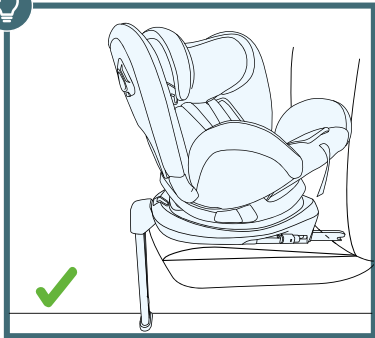


IMPORTANT! For safety reasons, when the leg is not fully extended from the seat base, the car seat locks and there is no rotation.

1

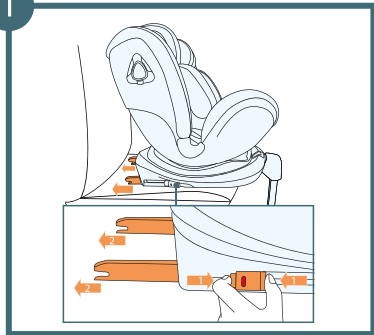

2

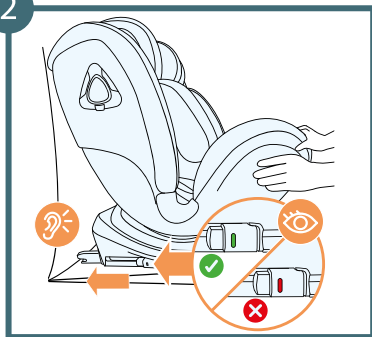

4.0 Mounting in the vehicle

4.1 ISOFIX mounting


Before placing the car seat in the vehicle, unfold the support leg.

1. Place the car seat with the unfolded support leg on the car seat. Press both sides of the ISOFIX release button and extend the arms of the ISOFIX connectors to their maximum length.
2. Hold the car seat with both hands and insert both clips into the attachments in the car seat. After hearing a "click" from each of the ISOFIX clips, push the car seat's base against the backrest of the car seat, applying firm, even pressure on both sides.

CAUTION! The locking clips are properly secured only when both button indicators are completely green.



Pay attention to the audible sound of the ISOFIX connectors snapping and grasp the seat and check that it is securely fastened, without any looseness. If it moves and the ISOFIX connectors slip out, repeat the previous steps.


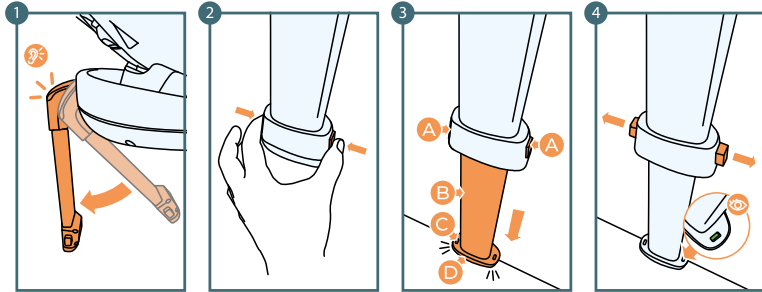


4.2 Assembly of the support leg

1. Pull the leg of the car seat out from the base and extend it fully.
2. Press the leg height adjustment buttons on both sides of the leg (this will release the leg extension lock, which will automatically extend).
3. Adjust the leg height so that the foot meets resistance from the floor.
4. Release the buttons.

If, after these steps, the car seat stands firmly in place and the installation indicator is green, the leg is correctly installed.






- A:** Leg height adjustment button (on both sides)
- B:** Leg extension
- C:** Leg base indicator
- D:** Leg base

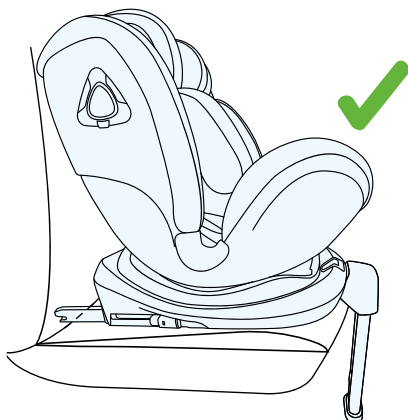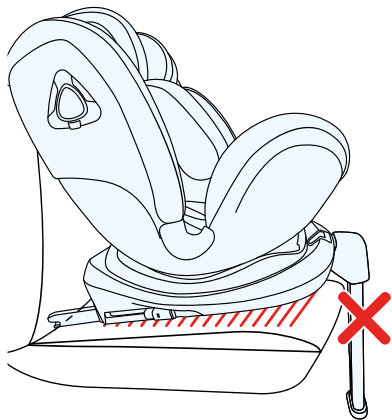

- **CAUTION!** Never mount the support leg on the storage compartment on the vehicle's floor, this risks the storage compartment collapsing in an accident; if in doubt, check with the vehicle's manual.

- **CAUTION!** The support leg must never hang in the air and no objects may be placed under it.

- **IMPORTANT!** Pay attention if the support leg serves as a support and does not raise the bottom side of the seat above the plane of the car seat.







A: Inner belt buckle
B: Inner straps
C: Buckle pad
D: Shoulder pads

E: Headrest adjustment lever
F: Headrest
G: Hook&loop tape
H: Rear part of the cover

5.0 Hiding the 5-point safety harness

1. Loosen the safety harness completely by pressing the button and pulling the safety harness. Remember! Do not pull on the shoulder pads.
2. Remove the shoulder and buckle pads by unfastening the hoop&loop tapes.
3. Place the headrest in the highest position.
4. Unclip the buckle.
5. Thread the buckle through the cover hole.
6. Unfasten the snaps and uncover the backrest of the car seat.

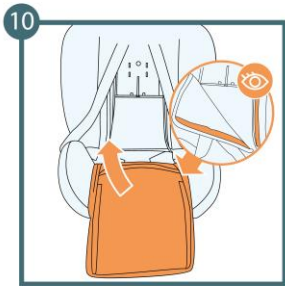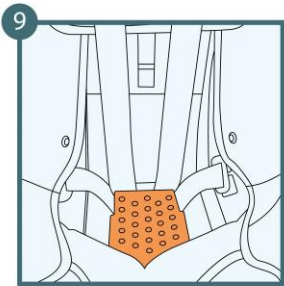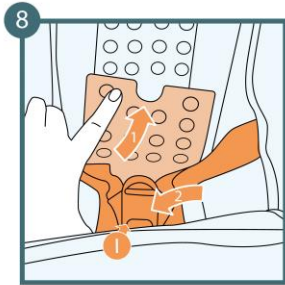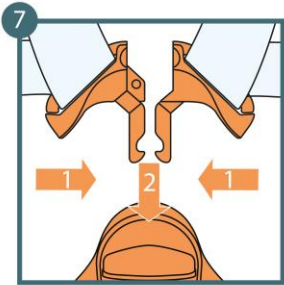





7. Fasten the 5-point safety harness.

8. Open the storage compartment lid, then insert the fastened safety harness into it.

9. Lay the belts flat along the backrest and close the storage compartment lid.

10. Put the cover back on the car seat, using the snaps located on the edges of the material.

i: Storage compartment for the straps

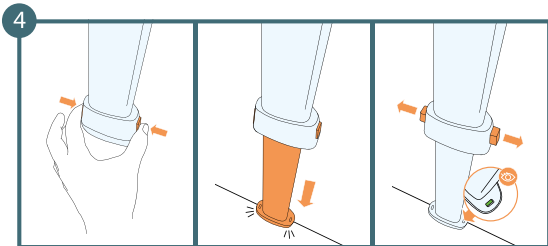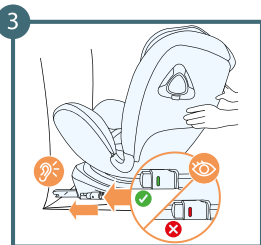
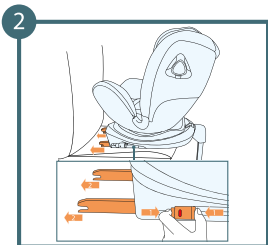
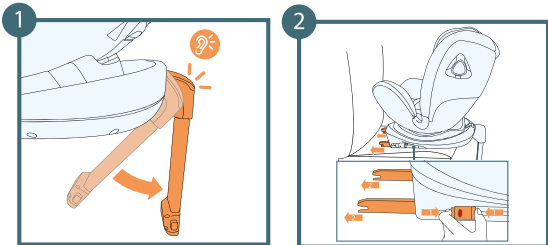


6.0 Car seat assembly

Caution! The seat should be placed directly on the vehicle seat.

6.1 Children with a height between 40 to 105 cm using the ISOFIX system with the support leg.

1. Extend the support leg.
2. Install the car seat on the seat using the ISOFIX connectors facing backward (if the car seat is already installed facing forward, rotate it using the rotation mechanism to face backward).
3. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
4. Press the support leg height adjustment button and hold it until the leg extends (adjust the leg height so that the foot meets resistance from the floor).

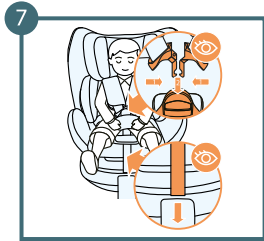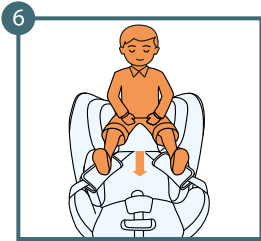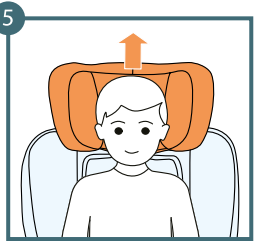





5.Adjust the headrest to the child's height.

6.Seat the child in the car seat.

7.Secure the child with the internal safety belts.






IMPORTANT: If the child has already reached 76 cm, pull out the inner insert before placing the child in the seat.

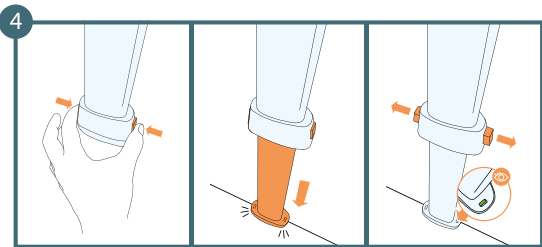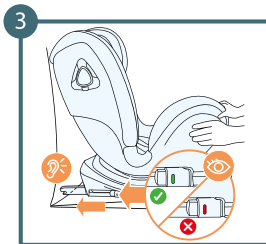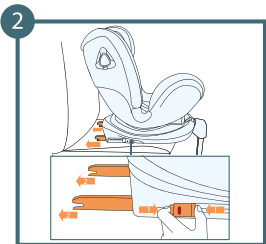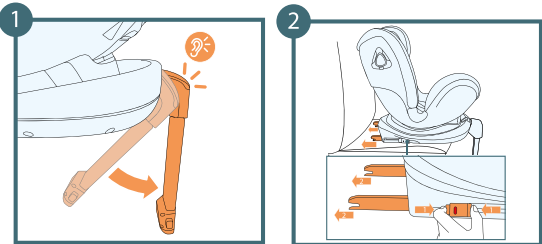

6.2 Children with a height between 76 to 105 cm using the ISOFIX system with the support leg.







1. Extend the support leg.
2. Install the car seat on the seat forward facing using the ISOFIX connectors (if the car seat is already installed reverse facing rotate it using the rotation mechanism to face forwards).
3. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
4. Press the support leg height adjustment button and hold it until the leg extends (adjust the leg height so that the foot meets resistance from the floor).

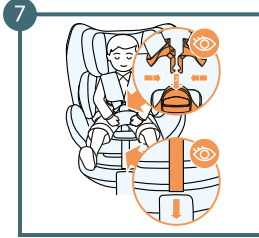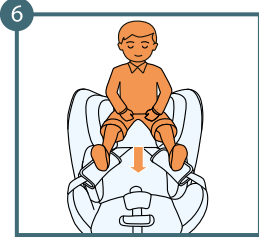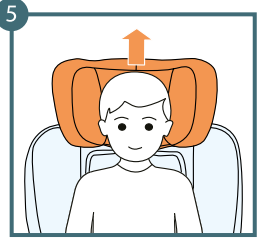

5.Adjust the headrest to the child's height.

6.Seat the child in the car seat.


7.Secure the child with the internal safety belts.

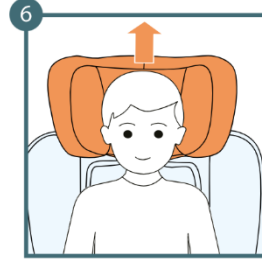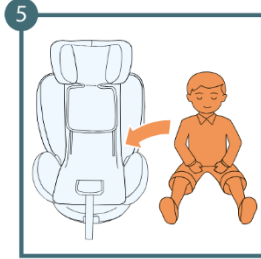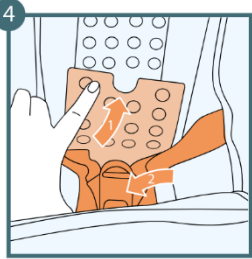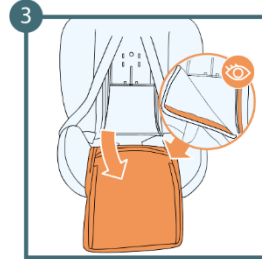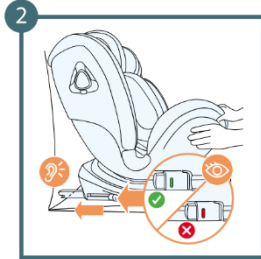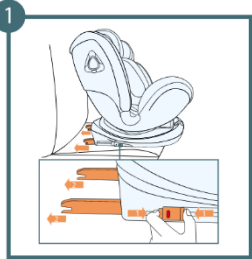

6.3 Children with a height between 100 to 125 cm using the ISOFIX connectors and a vehicle's 3-point safety belts.

1. Mount the car seat on the seat using the ISOFIX connectors facing forward.
2. Push the car seat as far as possible against the backrest of the seat and check for proper installation - the installation indicators should turn green.
3. Uncover the shell of the car seat by detaching the hoop&loop tapes located on its edges, and open the compartment for the belts located in the shell.
4. Store the 5-point safety belts in the compartment. The entire procedure is precisely described in the section regarding belt storage.
5. Place the child in the car seat.
6. Adjust the headrest to their height.


7

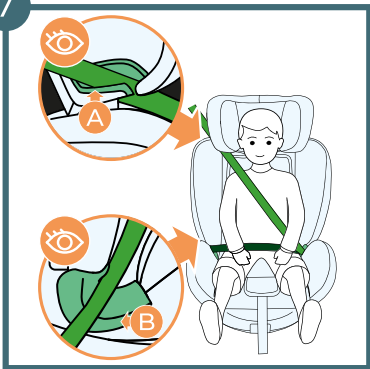

A: Shoulder strap guide

B: Hip belt guide





8

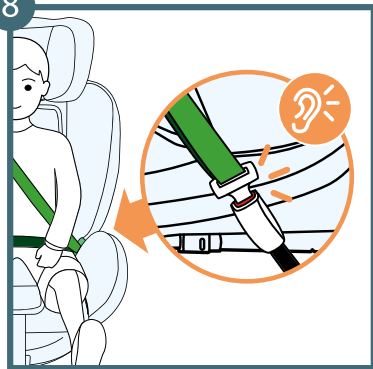

7.Thread the shoulder strap through the green shoulder strap guide.

8.Thread the car belt through both hip strap guides. Fasten the car belt.


You will hear a characteristic "click."

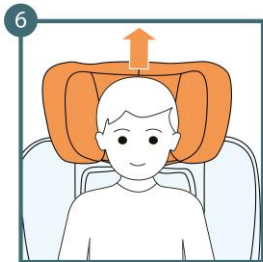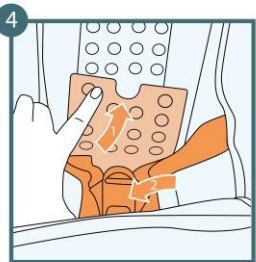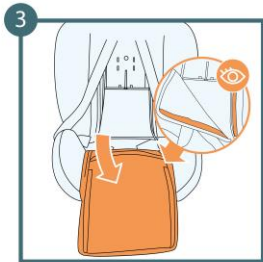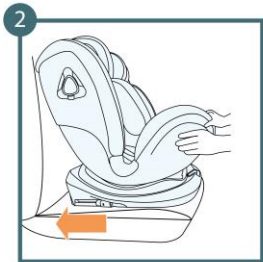

6.4 Children with a height between 100 to 125 cm using vehicle's 3-point safety belts.


1. Install the car seat on the seat facing forward.
2. Push the car seat as far as possible against the backrest of the seat.
3. Uncover the shell of the car seat by detaching the hoop&loop tapes located on its edges, and open the compartment for the belts located in the shell.
4. Store the 5-point safety harness in the compartment. The entire procedure is precisely described in the section regarding hiding the safety harness.
5. Place the child in the car seat.
6. Adjust the headrest to their height.

7



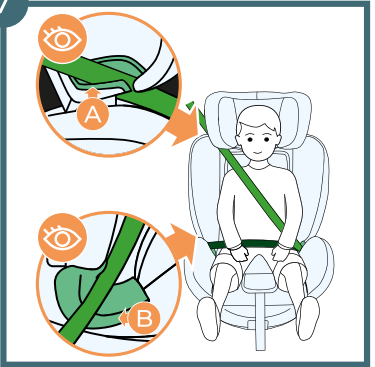


A: Shoulder strap guide
B: Hip belt guide

8

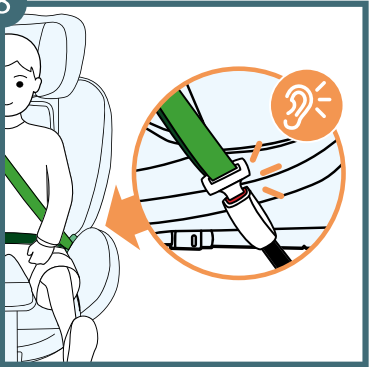


7.Thread the shoulder strap through the green shoulder strap guide.
8.Thread the car belt through both hip strap guides. Fasten the car belt.
You will hear a characteristic "click."

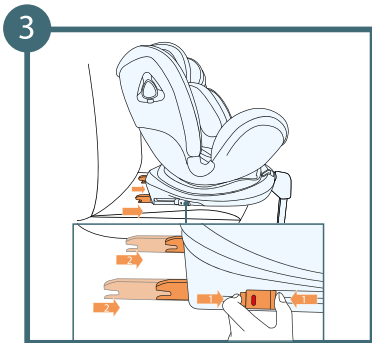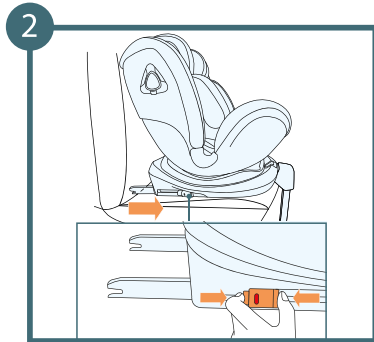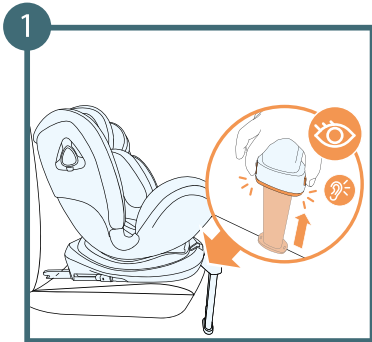

7.0 Disassembly of the car seat (ISOFIX installation system + support leg)




1. Fold the support leg extension by holding both buttons on the sides of the extension. Slide it upwards, tucking it into the remaining part of the leg. You will hear a "click," indicating that the leg has been stowed.
2. Press the release button located on both ISOFIX connectors. (The connectors will be released, and the ISOFIX buckle
3. Insert the ISOFIX arms into the base of the car seat using the sliding lever.

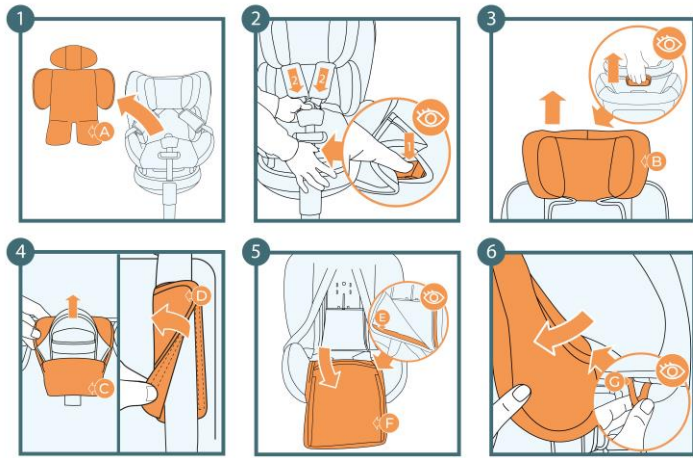

- A: Inner insole**
- B: Headrest**
- C: Buckle pad**
- D: Shoulder pad**
- E: Hoop&loop tape**
- F: Cover for the front part of the car seat backrest**
- G: Elastic band for the fabric fitting**

7.1 Cover disassembly

1. Remove the insole.
2. Loosen the safety belts completely by pressing the button and pulling the safety belts. Remember! Do not pull on the shoulder pads.
3. Adjust the headrest to the highest position.
4. Remove the shoulder and buckle pads.
5. Unfasten the hoop&loop tapes securing the cover to the front part of the backrest of the car seat.
6. Remove the fabric from the headrest, starting from the sides. Gently pulling on the fabric securing elastic band, detach it from the hook.

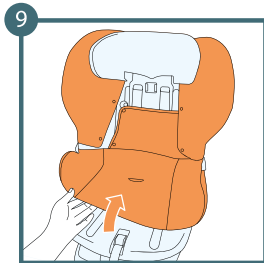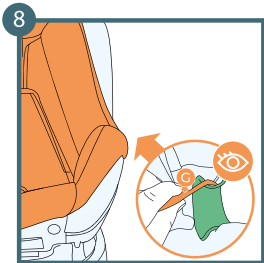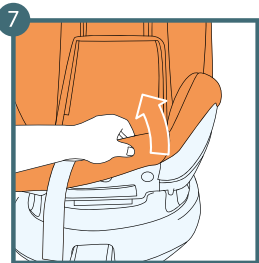

7. Starting from the bottom of the car seat, carefully remove the cover
8. Gently pull the elastic band holding the fabric in place and slide it away from the hip belt guides
9. Slide the whole material over the top of the seat

7.2 Cover assembly

To reinstall the cover simply reverse the above sequence of steps. Fit the cover to the attachment points on the seat. Start by fitting the cover to the shell of the car seat and finally to the headrest section.

G: Elastic band for the fabric fitting

8.0 Cleaning

CAUTION! Do not use the seat without the cover.

- The cover can be removed and washed with mild detergent on a gentle cycle (30°C).
- Follow the washing instructions provided on the cover's label. Washing at temperatures above 30°C may cause colors to fade.
- Do not spin or tumble dry the cover (which may cause layers of fabric to separate).
- Do not expose the cover to prolonged sunlight.
- Plastic components can be cleaned with water and mild soap.
 - Do not use aggressive cleaning agents (such as solvents).
- The harness can be cleaned with lukewarm water and soap. Warning! Metal fasteners should never be removed from the straps.

The full Warranty Terms and Conditions are available on the website WWW.KINDERKRAFT.COM



(AR) بضمان مصلحة عملائنا. نحن في خدمتكم! إذا كانت لديكم أي مشكلة مع المنتج الذي حصلتم عليه، فيجربى الاتصال بنا بالطريقة التي تفضلونها!

(CS) V zájmu péče o naše klienty - jsme rádi k dispozici! Pokud jste se setkali s nějakým problémem v souvislosti s obdržným výrobkem, kontaktujte nás způsobem, který vám nejlvíce vyhovuje!

(DE) In Sorge für unsere Kunden - stehen wir gerne zu Ihrer Verfügung! Wenn Sie auf ein Problem mit dem erhaltenen Produkt treffen, treten Sie bitte mit uns in Kontakt in der bequemsten Weise für Sie!

(EN) In the interests of our Clients - we are at your disposal! If you have a problem with the product you received, contact us in the most convenient way for you!

(ES) ¡Por el bien de nuestros clientes, estamos a su disposición! ¡Si tiene cualquier problema con el producto recibido, póngase en contacto con nosotros de forma más cómoda para usted!

(FR) Dans l'intérêt de nos clients - nous sommes à votre disposition! Si vous avez un problème avec le produit que vous avez reçu, Contactez-nous de la manière la plus pratique pour vous!

(HU) Bármikor állunk az ügyfeleink rendelkezésére! Ha az átvett termékkel kapcsolatban valamilyen problémába ütközött, az Onnek legmegfelelőbb módon vegye fel velünk a kapcsolatot!

(IT) Prendersi cura dei nostri Clienti - siamo alla Vostra disposizione! Se hai incontrato un problema con il prodotto che hai ricevuto. Contattaci nel modo piu conveniente per te!

(NL) In het belang van onze klanten - staan wij ter beschikking! Als u een probleem met het ontvangen product tegenkomt, neemt contact met ons op via de manier die u het makkelijkste vindt!

(PL) W trosce o naszych Klientów - jesteśmy do dyspozycji! Jeśli napotkałeś problem dotyczący otrzymanego produktu, skontaktuj się z nami w najbardziej dogodny dla Ciebie sposób!

(PT) Para o conforto dos nossos Clientes - estamos sempre à sua disposição! Se tiver qualquer problema com o nosso produto, entre em contacto conosco de modo mais confortável para si!

(RO) In interesul clienților noștri - suntem la dispoziția dumneavoastră! Dacă aveți o problema cu produsul pe care l-ați primit, contactați-ne în modul cel mai convenabil pentru dvs.!

(RU) заботясь о наших клиентах, мы находимся в вашем распоряжении. Если вы столкнулись с проблемой, связанной с полученными продукто, свяжитесь с нами наиболее удобным для вас способом!

(SK) Náš zákazník je pre nás dôležitý - sme vám k dispozícii! Ak máte akýkoľvek problém súvisiaci s doručeným produktom, kontaktujte nás spôsobom, ktorý vám najviac vyhovuje!

(SV) I våra kundens intresse - vi står till ditt förfogande! Om du har problem med den produkt du fick, kontakta oss på det mest praktiska sättet för dig!

International contact:

support@kinderkraft.com

+44 20 4525 0748



kinderkraftofficial



kinderkraft



kinderkraftofficial

منتج / VÝROBCE / HERSTELLER / MANUFACTURER / FABRICANTE / FABRICANT /
GYARTÓ / FABBRICANTE / FABRIKANT / PRODUCTENT / FABRICANTE / PRODUCĂTOR /
ПРОИЗВОДИТЕЛЬ / VÝROBCA / TILLVERKARE:

**4Kraft Sp. z o.o. ul. Tatrzańska 1/5
60-413 Poznań, Poland**